





Climate by Design International

2100 Park Drive • Owatonna, MN 55060 • 507.451.2198
 Fax: 507.451.1177 • sales@cdihvac.com • www.cdihvac.com

MS-12000/10000-ARID-Dry Units

Model	CFM	Fuel Type	"A" Dim.	"B" Dim.	"C" Dim.	Weight
CDH-R-154	12,000/10,000*	Gas or Electric	193"	96"	72"	7,600 lbs
CDH-R-154	12,000/10,000*	Dual	193"	96"	72"	7,600 lbs

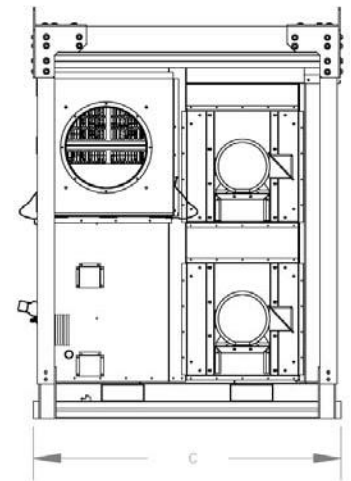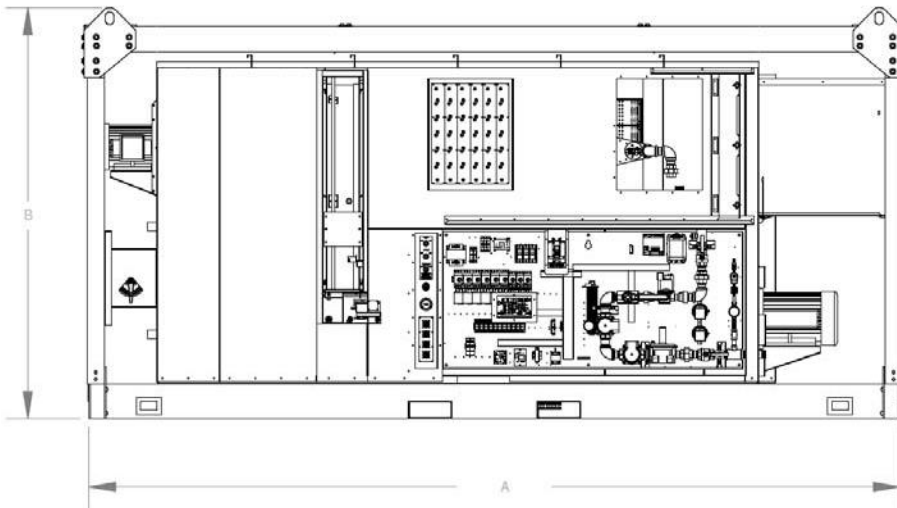

Max Air Volume	Moisture Removal Lbs/Hr 80°/60% RH	Moisture Removal Gallons/Day 80°/60% RH	Moisture Removal Lbs/Hr 55°/80% RH	Moisture Removal Gallons/Day 55°/80% RH	Moisture Removal Lbs/Hr 40°/80% RH	Moisture Removal Gallons/Day 40°/80% RH
12,000	295	851	253	729	169	486

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric Reactivation Load	Electric Reactivation FLA Load	Gas Reactivation FLA Load	CFH Gas Max Usage NG	Gallon/HR Max Usage LP
			230/1/60	460/3/60	460/3/60		
1.5"	7-14" w.c.	7-14" w.c.	N/A	292	42	718	7.6



Weights and Dimensions subject to change without notice *2" or 5" External Static Pressure ** Deduct 1500 lbs for removal of Protective Cage Revised 12/23/2020