

Rental Air Handler

120 Ton



General System Data

Fully packaged unit, completely assembled, arrives on job site ready for installation in minimal time.

Equipment Features & Options

- Skid mounted with fork pockets
- Constant Volume & VAV Option
- VFD with Bypass
- (4) 20" Standard discharge collars with adjustable seven position quadrant dampers.
- (6) 20" Standard return collars with adjustable seven position quadrant dampers.

Electrical Data



Nominal Voltage	460V / 60Hz / 3Ø
Single Point Power Connection (1 per Ø)	16 Series Male Cam
FLA	35 Amps
MCA	60 Amps

Physical Data


Length	156 1/4"
Width	8' 5"
Height	63.25"
Unit Weight	5,600 lbs.

Basic Equipment Data

Fluid Type	Water
Air Volume	15,000 CFM
Pleated Filters	(12) 24 x 20 x 2
Entering Fluid Temp (F°)	45°
Leaving Fluid Temp (F°)	55°
Fan Motor Horsepower	20 hp
Condensate Drain – FPT	3/4"
Chilled Water Connections	4" QC (M&F)
Equipment Insurance Value	\$66,000

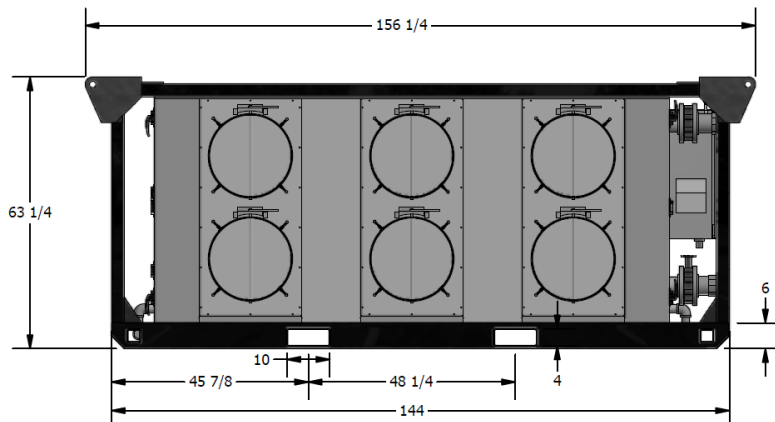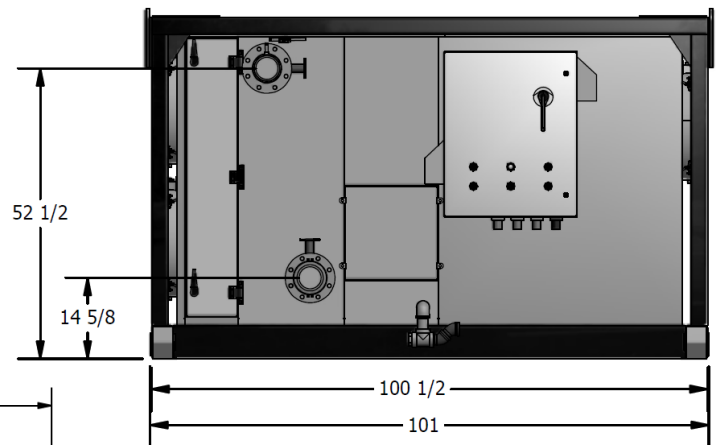


Unit Performance/Data

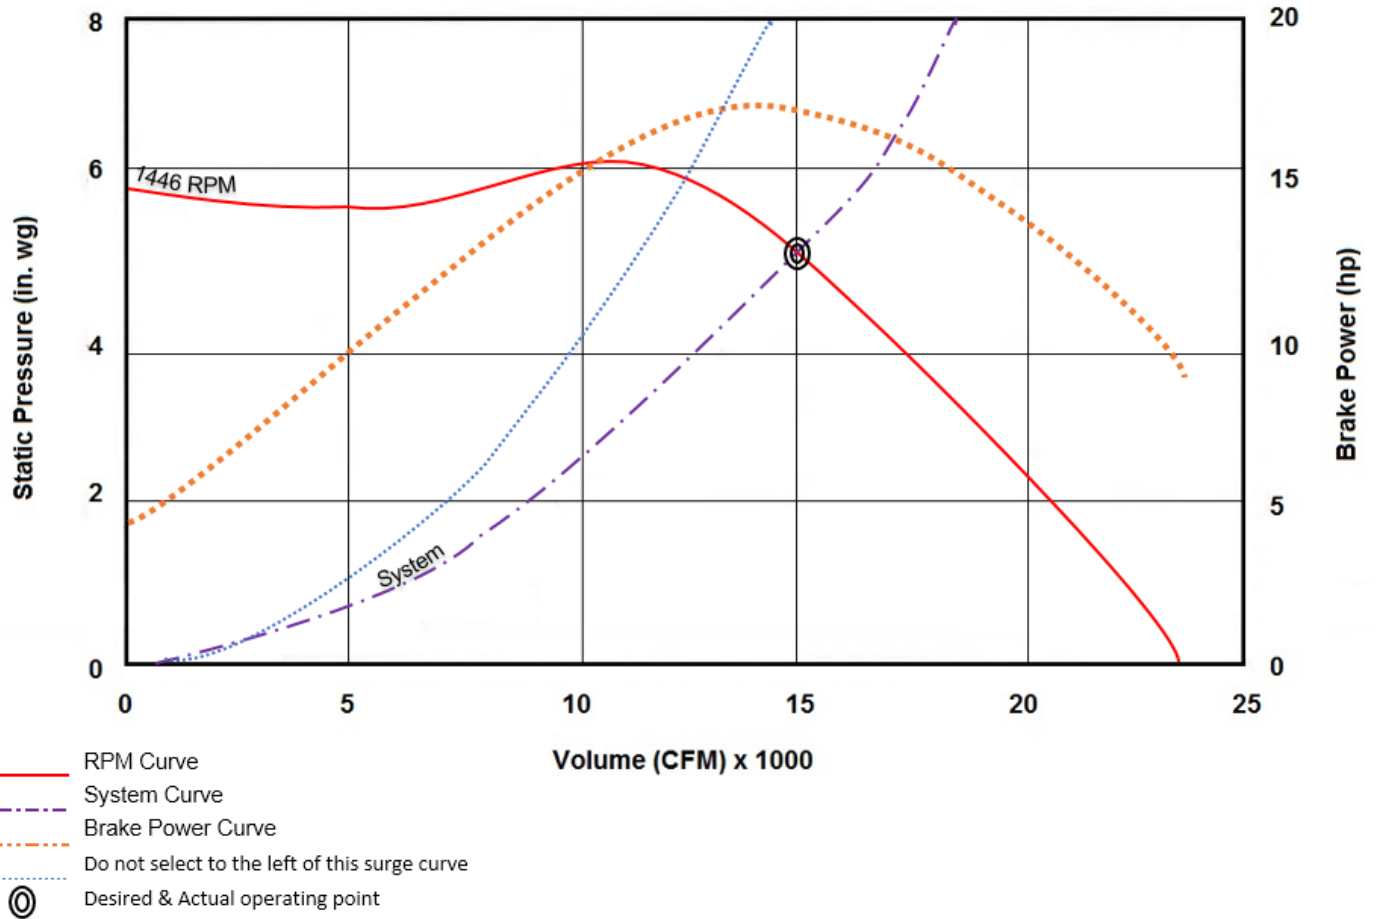

Coil Performance

CFM	FPM	EDB/EWB	LDB/LWB	MBH Total	MBH Sens.	ROW/FIN	EWT	LWT	GPM
15,000	481	95.0/80.0	52.9/52.8	1,462.0	690.6	8/11	45	55.2	287.0

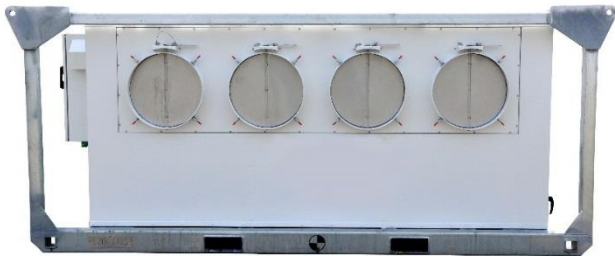

Four (4) 20" Supply Air Connections



Six (6) 20" Return Air Connections